

83% AMMONIUM NITRATE SOLUTION

Description

83% Ammonium Nitrate (AN) Solution consists of pure ammonium nitrate and water.

Uses

- As a component of explosive mixtures used in mining, quarrying and civil construction
- In the manufacture of catalysts for petroleum refining
- In the production of other nitrate salts


Handling and Storage

Ammonium Nitrate Solutions should be stored in stainless steel or other corrosion resistant vessels. Pipe lines and fittings should be of similar materials. These solutions must be stored above their salting-out temperatures. Heating coils or heat exchangers must be installed with storage vessels where ambient temperatures below salting-out temperatures are expected for long durations.

Ensure that 83% ammonium nitrate solution pumps are protected against loss of flow or deadheading and are thermally protected against exceeding a temperature of 325°F (160°C)

Shipping

83% Ammonium Nitrate Solution is classified as a hazardous material by the US Department of Transportation. The proper shipping name is: UN2426, Ammonium Nitrate, Liquid, 5.1. The Emergency Response Guidebook number is 140. Shipments are made by rail or tank trucks. Bulk shipments must be placarded.

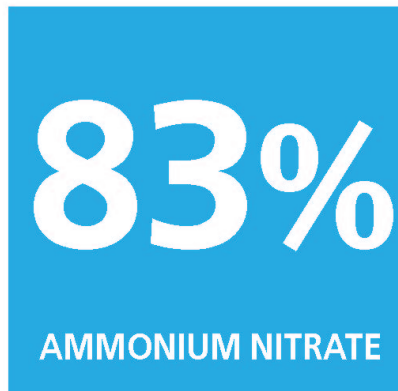

Chemical & Physical Properties

CAS Number	6484-52-2
pH (ATC pH probe)	Per requirements
Salt-Out Temperature	155°F (68.3°C)
Color	Clear
Odor	Little to no detectable odor
Weight per Gallon @200°F (93.33°C)	11.33-11.50 lbs/gal

Typical Analysis

Ammonium Nitrate	83.0%
Free Ammonia	Nil
Water (Approx)	17.0%



The data presented herein are believed to be accurate but are in no way guaranteed. TradeMark Nitrogen Corp. makes no warranties, express or implied, that any of the above data is fit for any particular use and expressly disclaims all oral warranties of any kind.

Rev:Aug-22



TradeMark Nitrogen Corp.

1216 Old Hopewell Road
Tampa, Florida 33619 USA
www.trademarknitrogen.com
800 452 3107
813 626 1181